


## Top Clean STABIL Heavy Duty

Extreme load – this entrance matting system with a strong cleaning performance has an enormous load capacity, even with only 10 mm profile height. Profiles are dimensionally stable and extremely durable. We recommend this system for entrance areas with high traffic. Suitable for lift trucks and transport trolleys. Rubber profiles alternating with cassette brushes and scraper bars provide optimal protection against dirt and moisture. Sound-absorbing, dimensionally stable, rollable and easy to clean. Available in any width and length. Special shapes at extra charge.

|                             |  |
|-----------------------------|--|
| <b>Aluprofil</b>            | Warp resistant aluminium profile (alloy EN AW 6060-6063, wall thickness up to 2.5 mm) for fully supported and self-supporting installation (substructure on site, maximum distance between supports 300 mm).   |
| <b>Upper / Combinations</b> | <p>You may choose between various installation options or even combine several options:</p> <ul style="list-style-type: none"> <li>• Anti-slip Grooved Rubber (EPDM), with lengthwise and crosswise grooves, heavy-duty and UV-resistant conforming to <a href="#">DIN 7863</a> (German Industrial Standard).<br/>Fire behavior Cfl-s1 conforming <a href="#">DIN EN 13501-1</a> (German Industrial Standard).</li> <li>• Cassette Brush made of robust, heavy-duty polyamide 6, slip-resistant properties R 13 conforming to <a href="#">DIN 51130</a> (German Industrial Standard).</li> </ul> |
| <b>Underside</b>            | Base of the mat is mechanically fitted with rubber inserts for anti-slip and noise reduction.  |
| <b>Connection</b>           | Stainless steel wire rope V2A for Ø 2 mm for 10 and 17 mm mat height,<br>Stainless steel wire rope V2A for Ø 3 for 22 mm mat height.   |
| <b>Lock</b>                 | Special threaded nipple with stainless steel screw (rust-proof).   |
| <b>Profile Spacing</b>      | Top Clean STABIL 10/13, 17 and 22 mm: 4 and 6 mm.<br>Profile spacing optional also in 3 mm for automatic door systems conforming to <a href="#">DIN 18650</a> .<br>Flexible spacers made of rubber.  |
| <b>Profile Colours</b>      | Natural aluminium. Profile can be supplied powder-coated to any RAL colour (for an extra charge).  |

### Cassette Brush

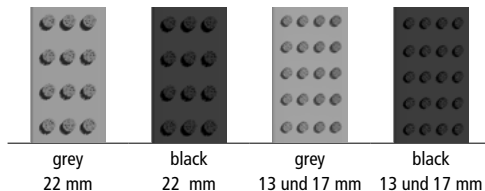


### Grooved Rubber




# Top Clean STABIL Possible Combinations


## Top Clean STABIL Grooved Rubber

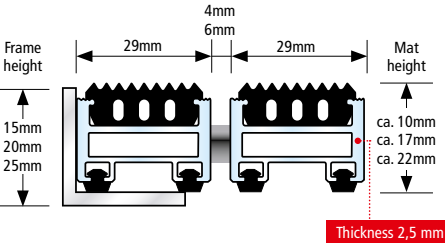


- For outdoor use
- Accessible
- Accessible with hand lift truck
- Recyclable
- Rust-proof

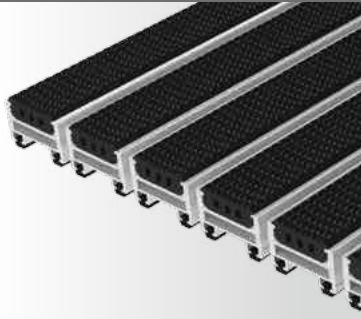


## Top Clean STABIL Grooved Rubber and Cassette Brush

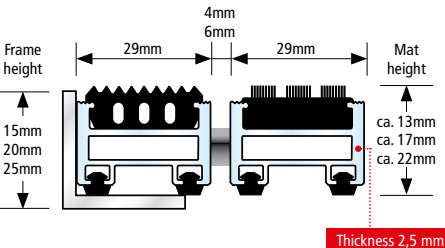


- For outdoor use
- Accessible with hand lift truck
- Recyclable
- Rust-proof

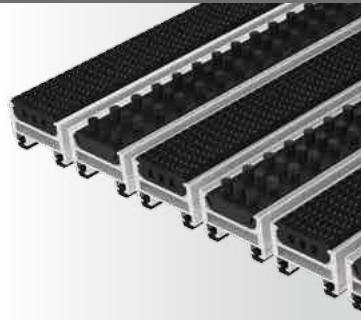

## Top Clean STABIL Cassette Brush

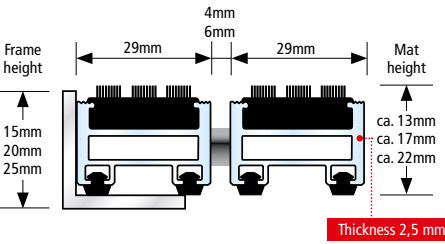

- For outdoor use
- Accessible with hand lift truck
- Recyclable
- Rust-proof

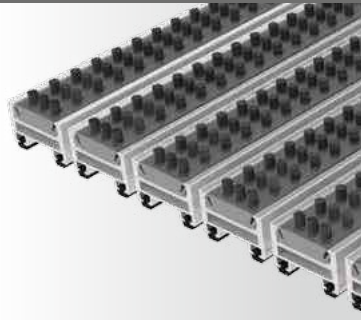

All profiles feature highly effective impact sound insulation!

3 | OUTDOOR AREA

